52



USER-FRIENDLY Intuitive touch screen display





FRONT LEVER (PADDLE)

Electronically managed to create and modify profiles

ENERGY SAVING SYSTEM

Component insulation and smart electronics for maximum energy efficiency

FULL CONFIGURATION

The boilers for both the coffee and

the auxiliary services are made from AISI 316 stainless steel, and

Equipped with tank (2,51) and water mains connection

MULTI-BOILER

are fully insulated

VOLUMETRIC PUMP

24V High performance Excellent stability during profiling

(*) WiFi module during the year 2023

ENERGY SAVING SYSTEM Component insulation and

smart electronics for maximum

energy efficiency.

TEMPCONTROL

For a very-high thermal stability (\pm 0.2 °C).

Characteristics



LED LIGHTING OF THE WORK AREA Allows efficient working in any condition

CONNECTIVITY

USB and Wifi









GROUP FLUSHING

With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.





Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS

Immedate mixing of cold / hot water for a better chemical and organoleptic quality.



AUTOMATIC CLEANING CYCLE Process for coffee group cleaning.

EASY SERVICE

Fast access to the internal

parts for quick and easy




VOLUMETRIC PUMP A new generation of pump to anplifying your experience






Versions

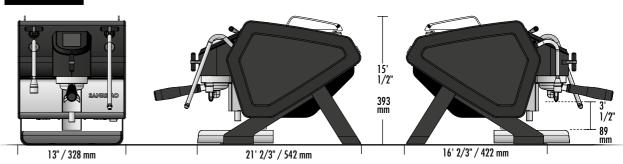







 ϵ

Technical data		
voltage/max input boiler	V	220-240V / 50-60HZ / 2.20 kW
		110-120V/ 50-60HZ / 1.65 kW
		100V / 50-60HZ / 1.45 kW
coffee boiler's resistor power	W	500
steam boiler capacity	lt	1
coffee boiler capacity	I	0.5
net weight	lb / kg	70.5 / 32
gross weight	lb / kg	79 / 36

_Colors

Blac	k: matt glossy (side frames)	RAL 9005
	White: matt glossy legs and side	RAL 9003 RAL 9005
Whit	e: matt glossy (side frames)	RAL 9003

Customizations available, see YOU_KIT catalogue for more info.



